

Serving our customers for over 31 years

# SWIFT Protech

Committed to people, service and quality

## Workstations

For nearly 30 years, manufacturers from around the world have trusted and relied on Swift Protech to provide the best, longest lasting, most reliable HMIs and automation control workstations to run their applications.

## Keyboards


With a >1 million operation switches life-expectancy, Swift Protech keyboards deliver unrivaled reliability and offer a variety of pointing devices, connectors and embossed keys for enhanced feel and alternative mounting.

## Computers, KVMs ...

Manufacturers need durable industrial grade communication devices-PCs, KVMs and Thin Clients- that provide precise and reliable computing performance with responsive peripheral devices. Swift Protech offer COTS and customizable communication devices utilizing the latest IoT technologies

## Monitors, Panel PCs ...

Swift Protech houses monitors and touch panels in a variety of rugged enclosures that allow the user to put their displays wherever they are needed -indoors or outdoors, general purpose or hazardous areas.

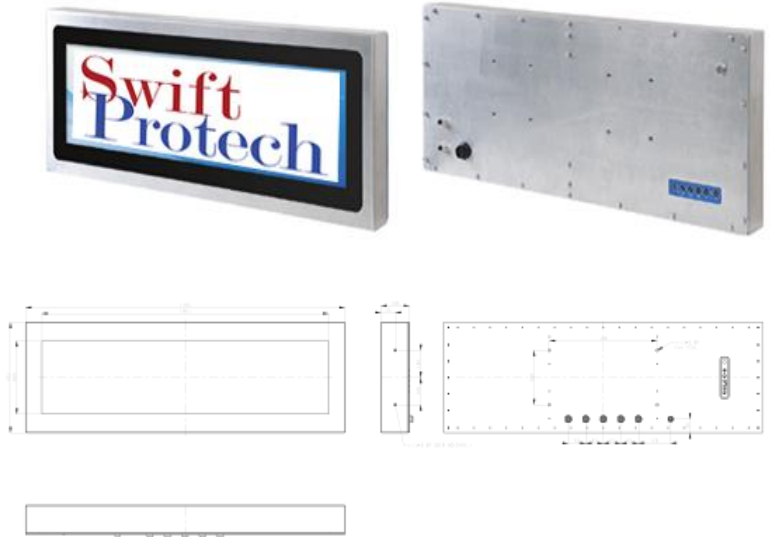

## Stretch Monitors

## Features

- 17"- 42" Wide format Industrial monitors
- 304 or 316L stainless steel enclosure
- Long MTBF LED backlights
- Standard and High Bright
- Resistive or capacitive touch screens
- Optional Auto-Brightness sensor
- Optional built in PC

# Specifications

	Specification	Normal	High Bright
19"	Max. Resolution	1680 x 342	1680 x 342
	Brightness / Contrast	300 cd/m <sup>2</sup> , 2000 : 1	700 cd/m <sup>2</sup> , 2000 : 1
	Response Time	≤ 8 ms ( G to G )	≤ 8 ms ( G to G )
	Viewing Angle (H. / V.)	178° / 178°	178° / 178°
	Backlight Type	LED	LED
28.5"	Model No.	<b>FCHX2857-X150L0</b>	<b>FCHX2857-X1A0L0</b>
	Max. Resolution	1920 x 540	1920 x 540
	Brightness / Contrast	500 cd/m <sup>2</sup> , 5000 : 1	1000 cd/m <sup>2</sup> , 5000 : 1
	Response Time	≤ 9 ms ( G to G )	≤ 9 ms ( G to G )
	Viewing Angle (H. / V.)	176° / 176°	176° / 176°
	Backlight Type	LED	LED
38	Model No.	<b>FCHX3817-X150L0</b>	<b>FCHX3817-X1A5L0</b>
	Max. Resolution	1920 x 540	1920 x 540
	Brightness / Contrast	500 cd/m <sup>2</sup> , 4000 : 1	1500 cd/m <sup>2</sup> , 4000 : 1
	Response Time	≤ 8 ms ( G to G )	≤ 8 ms ( G to G )
	Viewing Angle (H. / V.)	176° / 176°	176° / 176°
	Backlight Type	LED	LED
42"	Max. Resolution	1920 x 480	
	Brightness / Contrast	500 cd/m <sup>2</sup> , 3000 : 1	
	Response Time	≤ 8 ms ( G to G )	
	Viewing Angle (H. / V.)	178° / 178°	
	Backlight Type	LED	

Power	12V DC in.
Certification	FCC, CE
Operating Conditions	Temp: 0 C ~ 50 C (32F ~ 122F) Humidity: 10% ~ 90% (no condensation)



678-590-1634

[sales@swiftprotech.com](mailto:sales@swiftprotech.com)